





# Smart NX2

Payload up to  
**800 Kg** ■

Maximum horizontal reach  
**3.815 mm** ■

Repeatability  
**0,2 mm** ■

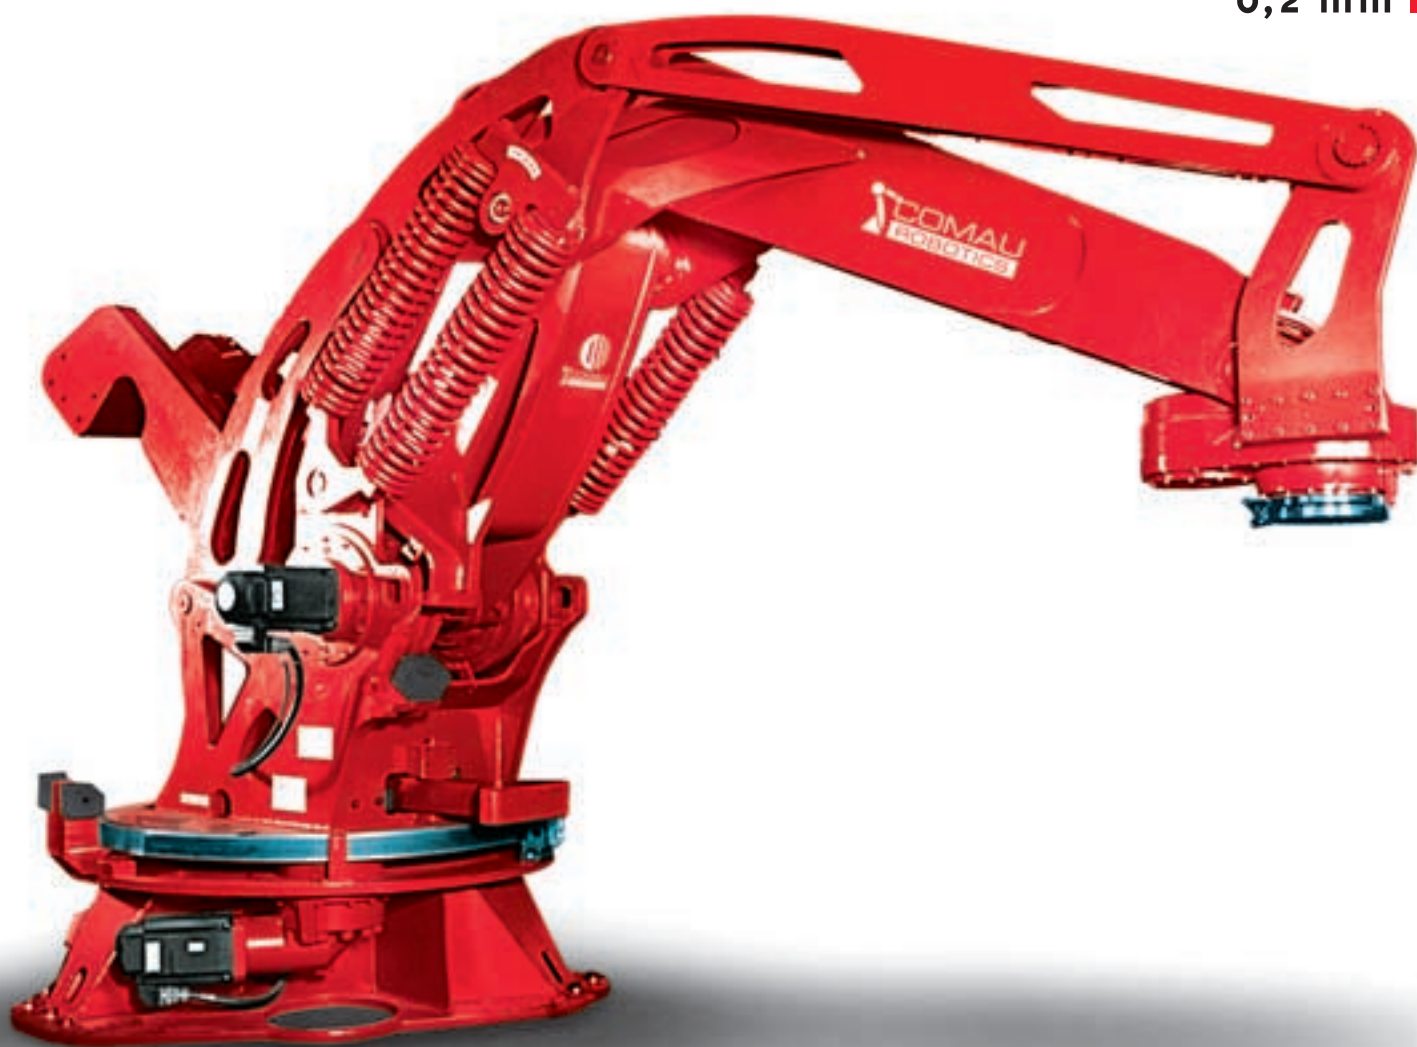

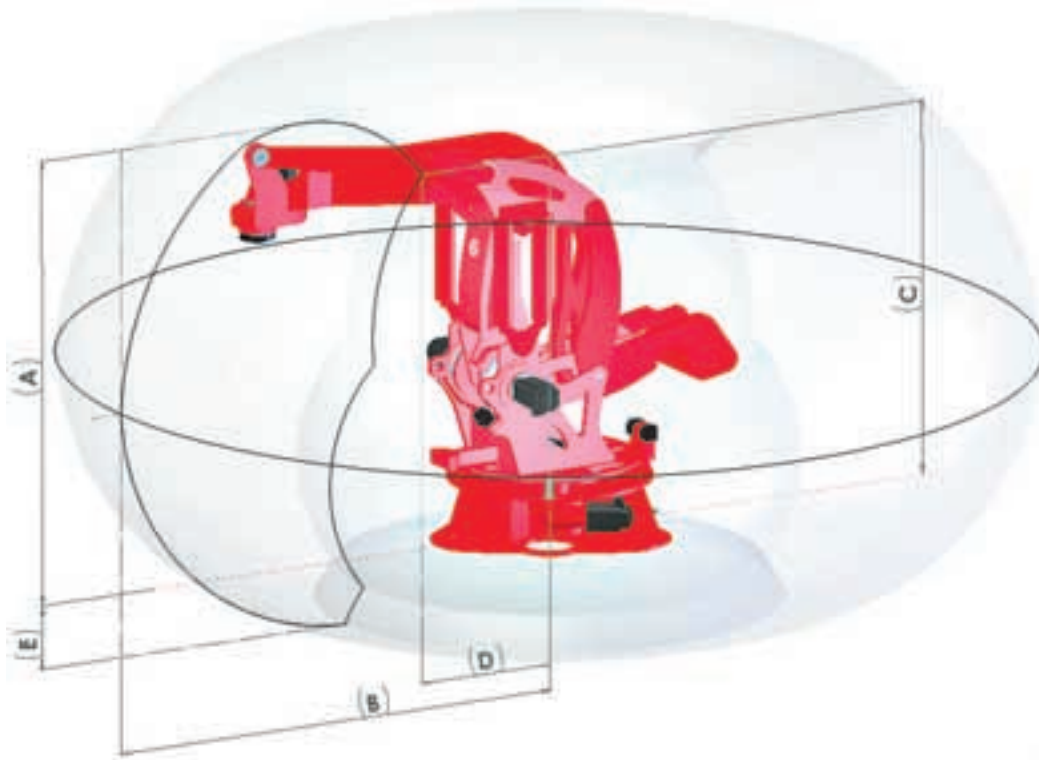


Foundry

Handling  
Packaging

ROBOT APPLICATIONS

Model		NX2 800-3.8			
Number of axes		4			
Load at wrist	(Kg)	800			
Additional load on forearm	(Kg)	50			
Torque of axes (Nm)	4	-			
	5	-			
	6	-			
Axes stroke (Speed)	1	+/- 180° (80°/s)			
	2	+65°-55° (80°/s)			
	3	-63°-190° (80°/s)			
	4	-			
	5	-			
	6	+/- 2.700° (75°/s)			
Repeatability ISO 9283	(mm)	0,2			
Maximum horizontal reach	(mm)	3.815			
Installation position		Floor			
Protection Class		IP65/IP67 wrist			
Operating Areas (mm)	A	3.546			
	B	3.816			
	C	2.990			
	D	1.135			
	E	510			
Foundry version		Available			

Sales \* +39 011 0045406 \* sales.robotics@comau.com  
 Service \* +39 011 0045553 \* service.robotics@comau.com  
[www.comau.com/robotics](http://www.comau.com/robotics)



The information contained in this brochure is supplied for information only. Comau S.p.A. reserves the right to alter specifications at any time without notice for technical or commercial reasons. The illustration does not necessarily show the products in their standard version. Design by amodo.it - ref.t25.hx06 - Printed in Italy by Graj Art - 05/06 - Turin